


EPOPLEX LS90 - SR 18 MONTROSE, OHIO

Project location: Ohio District 4 Route 18
Owner: Department of Transportation
Installation date: 7/27/04 and 6/6/06
Surface preparation: Partial removal of
Material used: Epoplex LS90 Polyurea
Glass beads used: Potters Visibead Plus II® and Swarco Poly-U-Blend®
Bead quantity: 12 lbs/gallon each
Installer: Century Fence Company
Surface: Asphalt
Data collected by: Epoplex Technical Services
Date of readings: 6/6/06
Number of readings: White - 22
Instrument used: LTL 2000
Note: The objective is to determine the extent of surface preparation required to install LS90 over LS90 in a 200 foot section



Original line after 22 months of service.

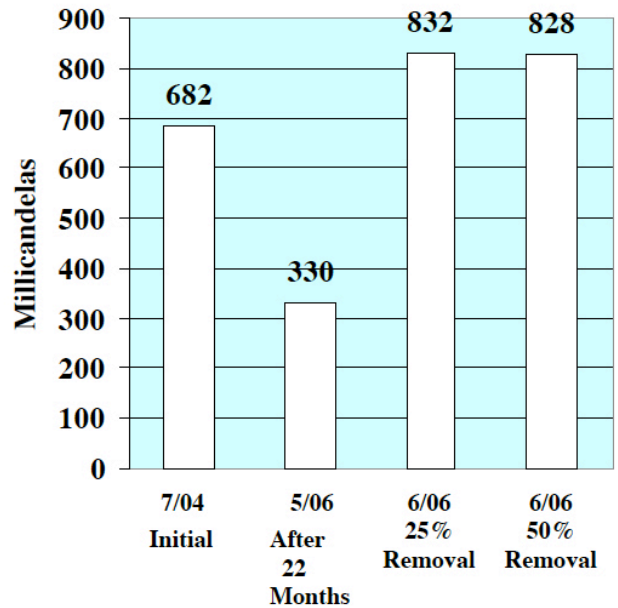

New line after partial removal